




Technical Data

**AUTOMATIC
LAVATORY-MOUNTED
SOAP DISPENSER**

**B-826
B-826.18**

Specify Model Required:

- Model B-826 Automatic Lavatory-Mounted Soap Dispenser
- Model B-826.18 Starter Kit. Includes B-826 Soap Dispenser, an 800ml lotion soap refill, 4 Alkaline D Cell Batteries

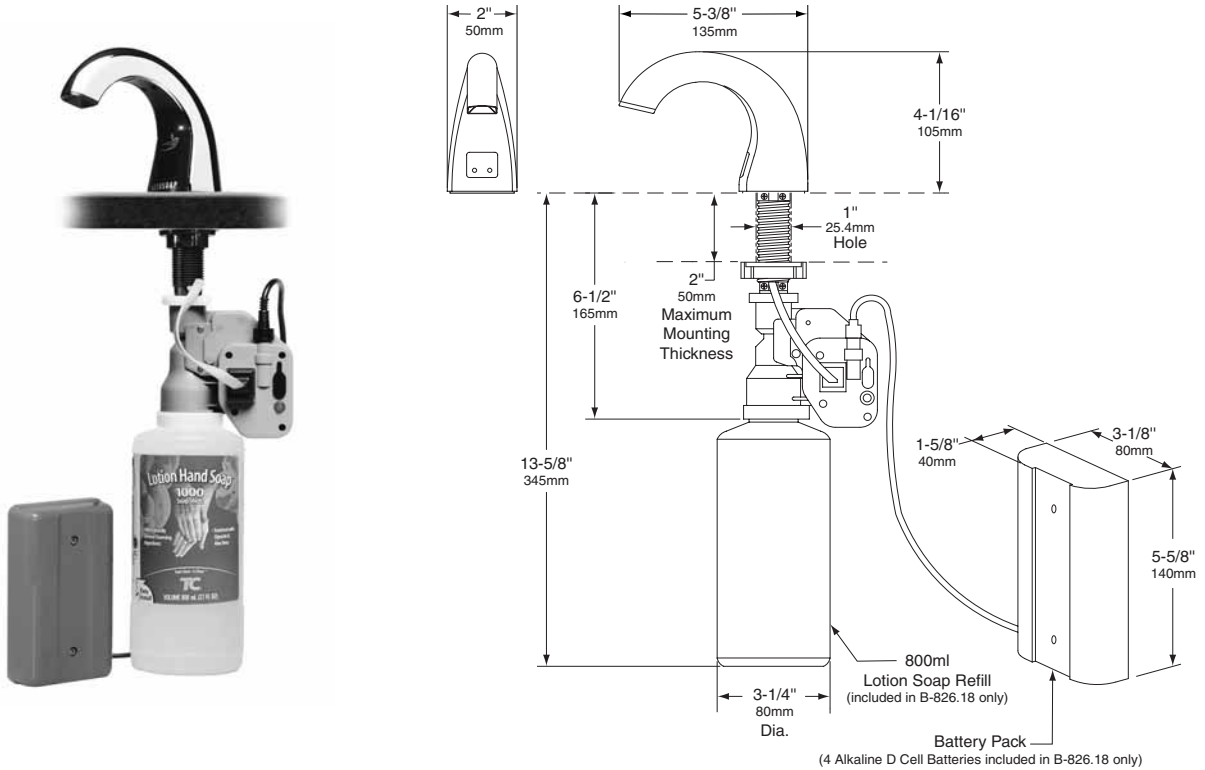

MATERIALS:

Spout Cover Assembly — Bright Polished chrome plated plastic with LED light indicators. Red blinking LED indicates soap level is low, Yellow blinking LED indicates battery life is low. Equipped with integral plastic shank.

Motor Assembly — Water resistant, plastic construction, fits onto bottom of shank and top of soap refill.

Battery Pack — Water resistant, plastic material, holds 4 Alkaline "D" Cell Batteries. Batteries are included in Model B-826.18 Starter Kit only. Average battery life is 100 soap refills or 2 years.

Soap Refill — OneShot® Soap Refill. Translucent, shatter-resistant polyethylene bottle. Includes new supply tube and pump mechanism in each refill. Soap refill available in 27 fl oz (800ml) and 54 fl oz (1600ml) capacities. One 27 fl oz (800ml) bottle of Lotion Hand Soap with Moisturizers is included in Model B-826.18 only. OneShot® is a registered trademark of Technical Concepts, LLC.

Optional Spacer — Plastic spacer is included for mounting dispenser when sink rim is 3/4" (19mm) high or greater.

OPERATION:

Place hand under soap spout for approximately 2 seconds. Spout will dispense controlled amount (0.8ml) of Lotion Hand Soap with Moisturizers, Antibacterial Hand Soap or Lotion Hand Soap. 27 fl oz (800ml) soap refill provides 1000 hand washes, the 54 fl oz (1600ml) soap refill provides 2000 hand washes. Motor assembly is preset for 27 fl oz (800ml) soap refill (if 54 fl oz (1600ml) is used, a switch under the rubber plug next to red reset button must be moved to 2K). Once a new soap refill is connected, pressing the red reset button automatically resets the low soap indicator LED and primes the new soap refill.

continued . . .